


Switchmode

15 Watts


CFM Series Features:

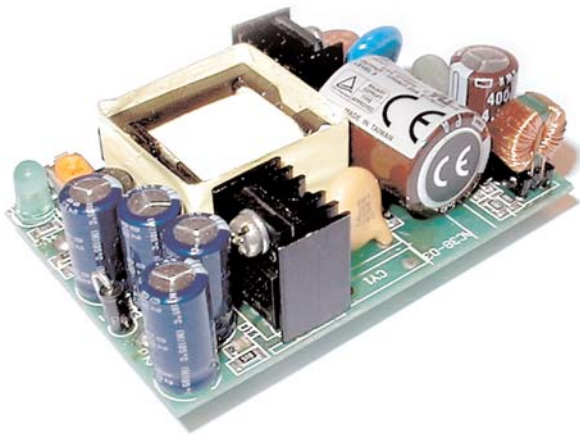

- Universal input
- Input to output isolation 3000Vac
- Open frame format
- Chassis mountable
- High efficiency
- Industry standard pin-out
- UL, CSA, TUV approved CE marked

Max Power	Output Voltage	Output Current	Efficiency	Model Type
15	3.3	3000mA	70%	CFM 1507S
15	5.0	3000mA	73%	CFM 1501S
15	12.0	1250mA	80%	CFM 1502S
15	15.0	1000mA	80%	CFM 1503S
15	24.0	630mA	82%	CFM 1505S

Dimensions

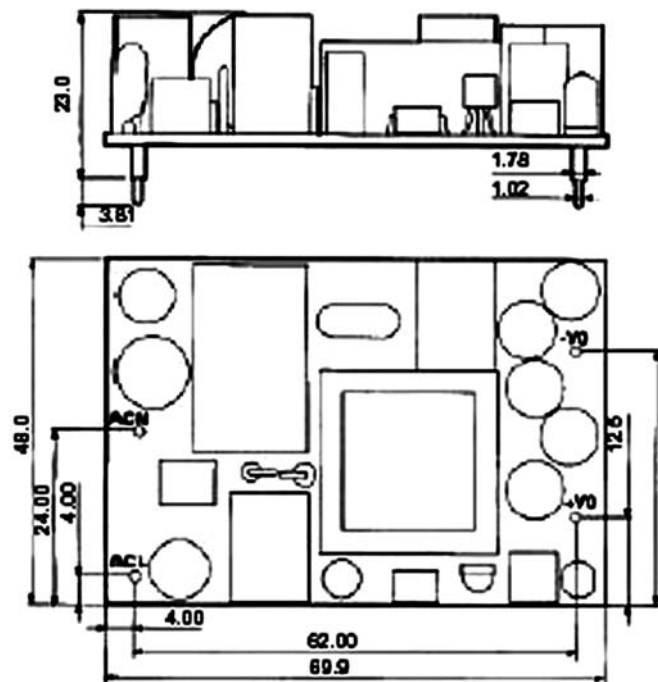

Specifications

AC Input	85 to 264 Vac 47 to 63 Hz.
Line Regulation	±0.05% max. over i/p range
Load Regulation	±1.0% max. (10-100% load change)
Hold-up Time	20mS typical (@ 115Vac input and full load)
Ripple and Noise	50mV (3.3 and 5 volt types), 1% of Vout nom. (all other types). Max. pk-pk. (20MHz.)
Temperature Range	Operating: 0°C to +45°C. Storage -40°C to +100°C