



CFM Series Features:

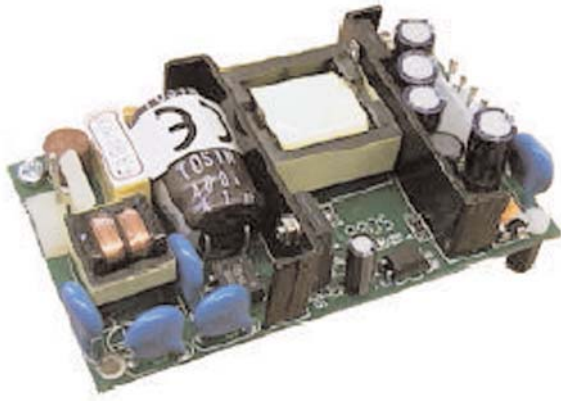

- Universal input
- Input to output isolation 3000Vac
- Open frame format
- Chassis mounting
- High efficiency
- Industry standard pin-out
- UL, CSA, TUV approved CE marked

Max Power	Output Voltage	Output Current	Efficiency	Model Type
60	3.3	8000mA	74%	CFM 60S033
60	5.0	8000mA	76%	CFM 60S050
60	9.0	6670mA	80%	CFM 60S090
60	12.0	5000mA	82%	CFM 60S120
60	15.0	4000mA	83%	CFM 60S150
60	24.0	2500mA	85%	CFM 60S240
60	48.0	1250mA	87%	CFM 60S480

Dimensions

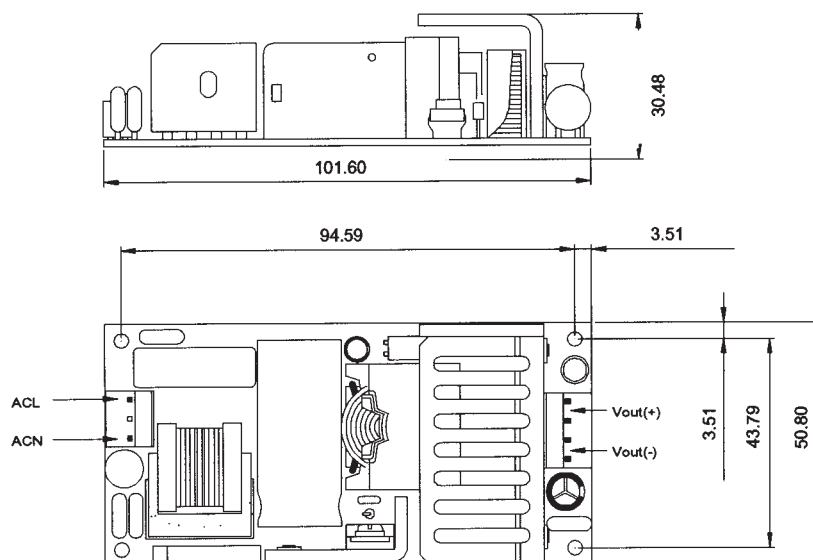

Specifications

AC Input	85 to 264 Vac 47 to 63 Hz.
Line Regulation	±0.05% max. over i/p range
Load Regulation	±1.0% max. (10-100% load change)
Hold-up Time	16mS typical (@ 115Vac input and full load)
Ripple and Noise	50mV (3.3 and 5 volt types), 1% of Vout nom. (all other types). Max. pk-pk. (20MHz.)
Temperature Range	Operating: 0°C to +45°C. Storage -40°C to +100°C