


## BCM Series Features:

- IUU 3 stage charging
- Indicators for 'bulk' 'equalise' and 'float'
- 5-LED bar-graph current display on larger models
- Rugged construction
- Reverse battery protection
- Short circuit protection
- Overvoltage shutdown
- Multiple outputs via diode splitters
- Temperature compensation option

Boost Voltage	Float Voltage	Output Current	No. of Outputs	Cooling	O/P Current Display	Width W mm	Height H mm	Fix Crs X mm	Fix Crs Y mm	Weight Kg.	Model Type
14.4	13.8	15	2	Convection	No	156	191	70	181	1.2	BCM 1215 / 2
14.4	13.8	30	3	Fan	No	170	242	70	232	1.8	BCM 1230 / 3
14.4	13.8	50	2	Fan	Yes	175	353	100	343	2.8	BCM 1250 / 2
28.8	27.6	8	2	Convection	No	156	191	70	181	1.2	BCM 2408 / 2
28.8	27.6	15	3	Fan	No	170	242	70	232	1.8	BCM 2415 / 3
28.8	27.6	25	2	Fan	Yes	175	353	100	343	2.8	BCM 2425 / 2
28.8	27.6	50	2	Fan	Yes	220	353	100	343	4.8	BCM 2450 / 2

## Dimensions

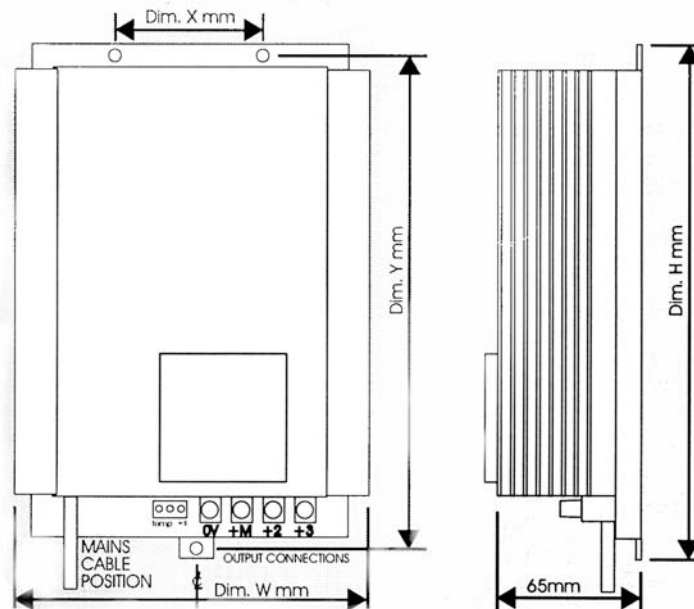

## Specifications

AC Input	180 - 270 Vac 47 - 63 Hz.
Efficiency	80% typical.
Protection	Reverse battery polarity, under-voltage shut down on input, over voltage shutdown on output, short-circuit output.
Temperature Range	Operating: 0-45°C at full power. Thermal protection by self-resetting trip.